BCBV36 B-Vent Gas Fireplace

The Hearth & Home Technologies BCBV36 provides substantial width and hearth depth, giving greater visual hearth area than competitive models in the same category. A first-class spacesaver, the BCBV36 will also fit tight into corners and requires only a minimum chase depth. Available as a radiant model, the BCBV36 offers the best look and quality in its class.

HEARTH & HOME technologies

- BCBV36I features a revolutionary electronic intermittent pilot system (IPI) that lights the pilot first and then ignites the main burner. When the fireplace is not operating, the pilot also shuts down. System can run on electricity or can operate on two "D" size batteries (batteries not included).
- 23,000 Btu/input per hour.
- Substantial hearth depth (15 3/4") provides greater visual hearth area and is larger than competitive models in the same category.
- Three-piece hand-painted log set provides a realistic wood-like fire.
- Forward door location and new ash lip design allows firescreens to be fully opened for a more dramatic view.
- Precoated steel has a deep, solid luster, the look of meticulous craftsmanship, and is resistant to abuse.
- Lockseam construction and single-piece face for rigid strength.
- Thin column design accents firebox opening height and provides improved firebox appearance.
- Simplified framing requirements allows the top header to be positioned on top of the firebox assembly (standoffs have been eliminated).
- Extra strength dual nailing flanges may be attached to either the vertical studs or to the floor supporting the unit and prevent racking.
- Outstanding draft characteristics, using 5" B-Vent.

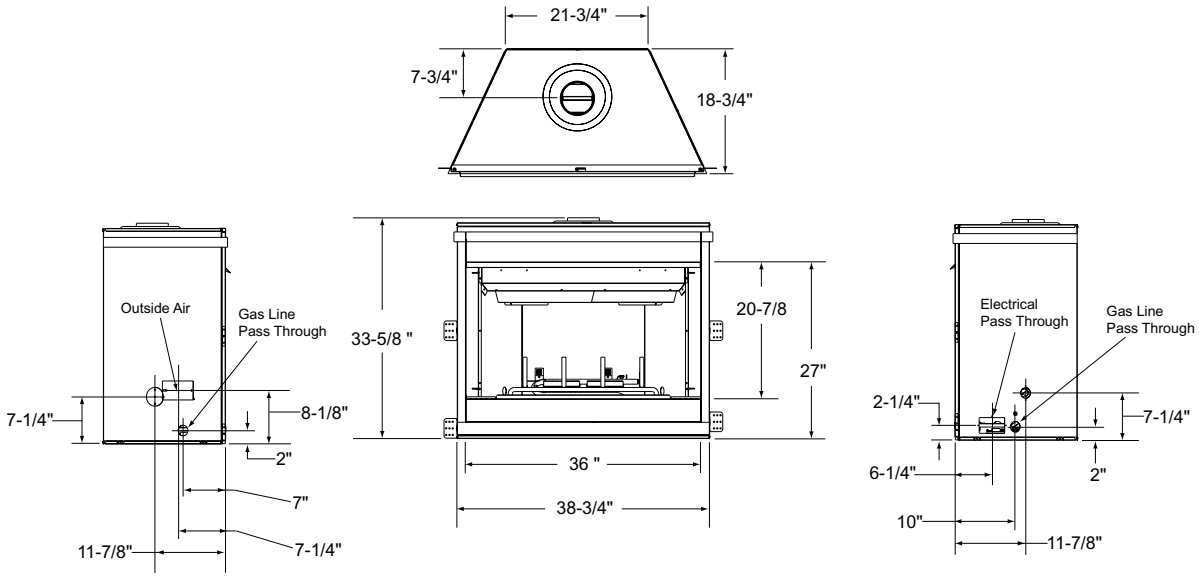

Framing Dimensions

Rough Framing Dimensions

- Width - 39 5/8"; Height - 33 5/8"; Cavity Depth - 19 1/4"

Clearances to Surround/Combustibles

- Minimum mantle height - 40" above the base of the fireplace.
- Minimum clearances: Top - 0"; Floor - 0"; Back and sides of fireplace - 1"

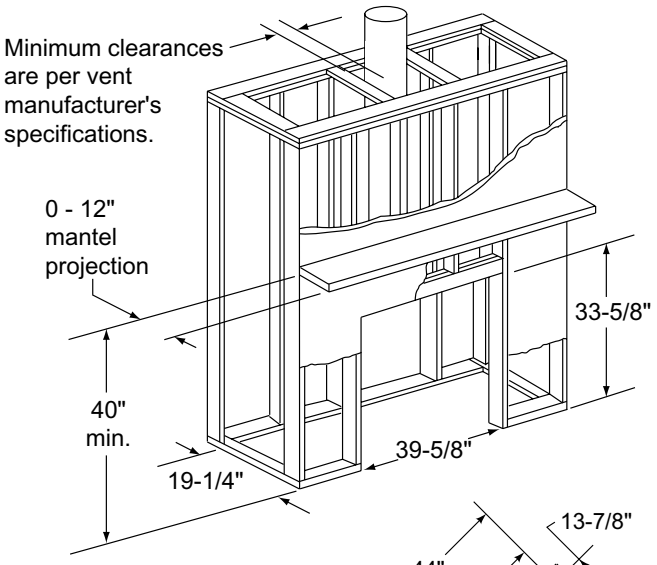

Finishing Materials

When finishing the BCBV36 Series, combustible material may be brought up to the sides of the fireplace but must never overlap the black area. The black metal may be covered with noncombustible material only such as marble, tile, stone, etc. You cannot cover the slots below the firebox opening, as this may cause a fire hazard.

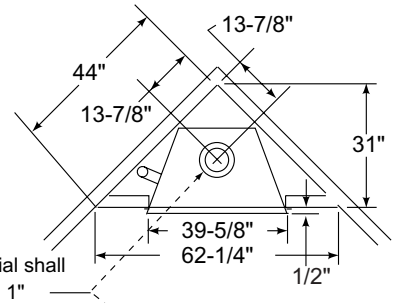

All framing material shall be no closer than 1" from the top edge of the extruded rim (see inset).

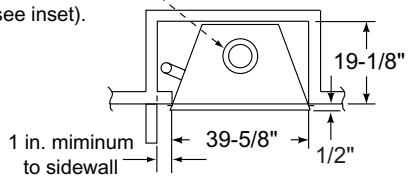

Options

BCRK36	Brick Kit	$ 78
DM1036	Black Bi-Fold Door	$260
DM1036B	PB Bi-Fold Door	$260
DM1036S	SS Bi-Fold Door	$260
AK-TV	Outside Air Kit	$ 40
DKCN	NG Conversion Kit	$ 52
DKCP	LP Conversion Kit	$ 52
RC-Smart	Remote Control	$165
Smart-Stat	Remote Control	$199

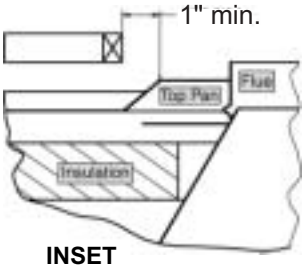

INSET

Venting Specifications

This appliance requires a 5" B-vent venting system for operation. Never downsize pipe. See B-vent manufacturer's instructions for installation.

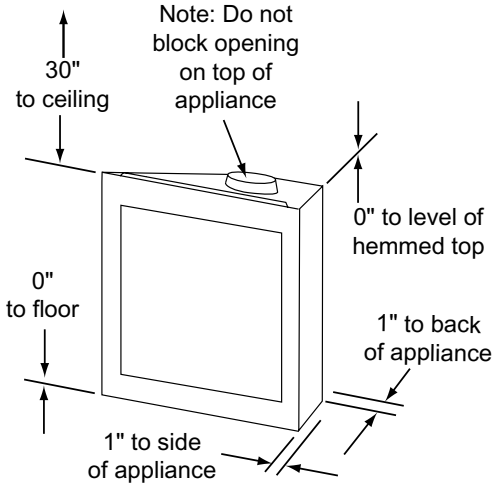
30" to ceiling
Note: Do not block opening on top of appliance
0" to level of hemmed top
0" to floor
1" to back of appliance
1" to side of appliance

Safety Standards

- UL Listed for assurance of safety and quality.
- Limited Lifetime Warranty.
- Approved for use in bedrooms with at least 1,150 cubic foot volume.

Email us at: info@hearthnhome.com
Visit our web site at
www.hearthnhome.com
or fireplaces.com

HEARTH & HOME technologies

Hearth & Home Technologies
20802 Kensington Boulevard
Lakeville, MN 55044
(952) 985-6000 Fax (952) 985-6001